


# VFM・WFM・NMF接続用 MSコネクタ

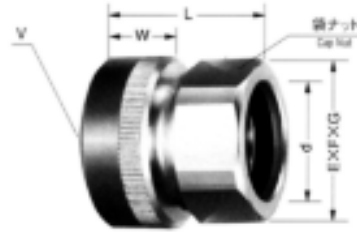

※サンプル希望の場合は、お問い合わせ時に「型番」の記載をお願いいたします。

タイプ	サイズ		MSコネクター 接合ネジV	最少内径		有効ネジ 長さW	全長 L	対辺 E	対角 F	角数 G	概算 重量 g/m	標準 単価
	MS サイズ	フレックス サイズ		MS コネクター	MAS コネクター d							
MAS-MS	8S・10S	12	1/2・28UNEF	8.1	10.0	10.0	30	26.0	28.0	6	65	
MAS-MS	10SL・12S 12・12SL	12	5/8・24UNEF	9.3	12.0	10.0	30	26.0	28.0	6	65	
MAS-MS	14・14S	12	3/4・20UNEF	12.2	12.0	10.0	30	26.0	28.0	6	65	
MAS-MS	14・14S	16		15.0	10.0	31	30.0	32.0	6	88		
MAS-MS	16・16S	16	7/8・20UNEF	15.3	15.0	10.0	31	30.0	32.0	6	88	
MAS-MS	16・16S	22		20.0	10.0	31	35.0	38.0	6	120		
MAS-MS	18	12	1・20UNEF	19.9	12.0	10.0	30	26.0	28.0	6	75	
MAS-MS	18	16		15.0	10.0	31	30.0	32.0	6	80		
MAS-MS	18	22		20.0	10.0	31	35.0	38.0	6	128		
MAS-MS	20・22	12		12.0	10.0	30	26.0	28.0	6	65		
MAS-MS	20・22	16	13/16・18UNEF	22.7	15.0	10.0	31	30.0	32.0	6	88	
MAS-MS	20・22	22		20.0	10.0	31	35.0	38.0	6	120		
MAS-MS	20・22	28		26.0	10.0	39	44.0	48.0	6	200		
MAS-MS	24・28	22	17/16・18UNEF	29.2	20.0	10.0	31	35.0	38.0	6	120	
MAS-MS	24・28	28		26.0	10.0	39	44.0	48.0	6	200		
MAS-MS	24・28	36		35.0	10.0	42	53.5	57.5	8	275		
MAS-MS	32	22		20.0	11.5	38	35.0	38.0	6	170		
MAS-MS	32	28	13/4・18UNS	37.2	26.0	11.5	39	44.0	48.0	6	200	
MAS-MS	32	36		35.0	11.5	42	53.5	57.5	8	275		
MAS-MS	32	42		40.0	11.5	47	60.5	64.5	8	385		
MAS-MS	36	22		20.0	13.0	38	35.0	38.0	6	170		
MAS-MS	36	28	2・18UNS	43.5	26.0	13.0	39	44.0	48.0	6	200	
MAS-MS	36	36		35.0	13.0	42	53.5	57.5	8	275		
MAS-MS	36	42		40.0	13.0	47	60.5	64.5	8	385		
MAS-MS	40	28		26.0	13.0	39	44.0	48.0	6	200		
MAS-MS	40	36	21/4・16UN	49.6	35.0	13.5	42	53.5	57.5	8	275	
MAS-MS	40	42		40.0	13.5	47	60.5	60.5	8	385		
MAS-MS	40	54		51.0	13.5	50	72.0	72.0	8	475		
MAS-MS	44	54	21/2・16UN	56.0	51.0	14.5	50	72.0	72.0	8	475	
MAS-MS	44	70	63.0	14.5	58	86.0	86.0	8	795			
MAS-MS	48	42	3・16UN	68.8	40.0	13.5	47	60.5	60.5	8	385	
MAS-MS	48	54		51.0	16.5	50	72.0	72.0	8	475		
MAS-MS	48	70		63.0	16.5	58	86.0	86.0	8	795		
MAS-MS	48	82		78.0	16.5	68	105.0	105.0	8	1160		

(明記以外の寸法単位はmmです。)

※本製品は改良のため予告なしに変更されることがあります。